

### APPLICATION

The general purpose vibration level switch is a great choice for dirty liquids including those with light to medium coating, scaling or foaming characteristics. Media examples include wastewater, diluted caustic soda and light weight oil. For optimum performance and proactive maintenance, the sensor automatically adjusts for coating build up, and if necessary, outputs a preventative maintenance alarm. The IA relay provides a reliable switch interface with remote devices such as a PLC, SCADA or alarm. The submersible sensor is universally mounted through the wall or inside the tank.

### FEATURES

- ✓ Automatic coating adjustment optimizes sensor performance with media build-up
- ✓ Ryton® sensor and PP cable rated NEMA 6 or IP68
- ✓ Coating preventative maintenance alarm saves time and money
- ✓ IA relay selectable NO or NC via power supply wiring polarity



LZ12-1405  
Shown

### SPECIFICATIONS

Orientation:	Universal
Accuracy:	± 1 mm in water
Repeatability:	± 0.5 mm in water
Supply voltage:	12-30 VDC
Consumption:	25 mA maximum
Contact type:	(1) SPST relay
Contact rating:	60 VA
Contact output:	Selectable NO/NC
Maint. alarm:	NPN transistor, 10 mA max.
Process temp.:	F: -40° to 176° C: -40° to 80°
Pressure:	150 psi (10 bar) @ 25° C., derated @ 1.667 psi (.113 bar) per °C. above 25° C.
Sensor rating:	NEMA 6 (IP68)
Sensor material:	Ryton® (glass filled), Viton® cable grommet
Cable jacket mat.:	Polypropylene
Cable type:	5-conductor, #24 AWG (shielded)
Cable length:	Standard: 10' (3m) Special order: 25' (7.6m) or 50' (15.2m)
Process mount:	3/4" NPT (3/4" G)
Mount. gasket:	Viton®
Classification:	General purpose
CE compliance:	EN 61326 EMC (pending) EN 61010-1 safety


### INTELLIGENCE

Using advanced self-learning technology, the level switch automatically adjusts to increased material build-up on the forks for maximum coating performance. If the coating becomes too significant, then the sensor will actuate a transistor alarm for proactive maintenance.



### RELAY CONTROL

For process automation with pumps, valves and alarms, package your vibration level switch with our remote relay controllers offered in a 35 mm DIN package. See page 55 for more details.

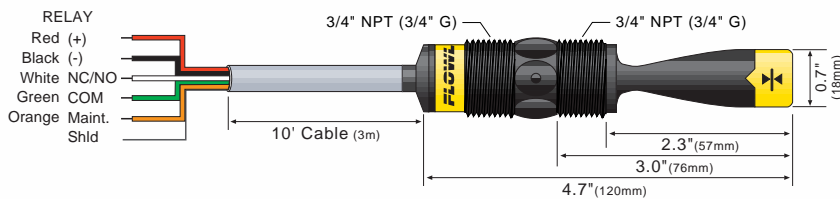

LC42  
Shown

Vibration

ORDER

LZ12-14  5

Process mount (1)  
0 3/4" NPT (US)  
2 3/4" G (Metric)

#### Ordering Notes

- 1) To special order a 25' (7.6m) or 50' (15.2 m) sensor cable, place the cable length at the end of the part number (ie: LZ12-1405-25).